

FCP 系列泳池泵

SERIES SWIMMING POOL PUMPS



FCP series self-priming pumps are special designed for swimming pool. It has a large strainer basket, double insulated from pool water for extra safety. It can be also used for the circulation system of Sauna or other occasion needed water to be filtered clear.



FCP 系列自吸泵专为游泳池的水过滤而设计，有较大的过滤篮及对水绝缘双保险。它也可以用于桑拿系统中用作循环泵。也可以在需要净水的场合作为过滤器使用。

WORKING CONDITIONS

- Max Temperature of Fluid up to +40°C
- Max Pressure 10bar
- Max Ambient Temperature up to 40°C

工作条件：

- 最高流体温度为40°C
- 最大可承受的压力10bar
- 最高环境温度40°C

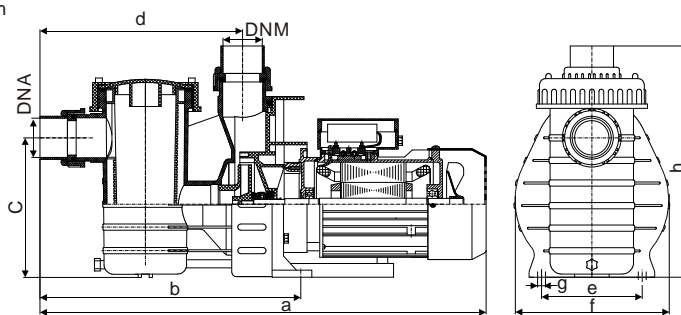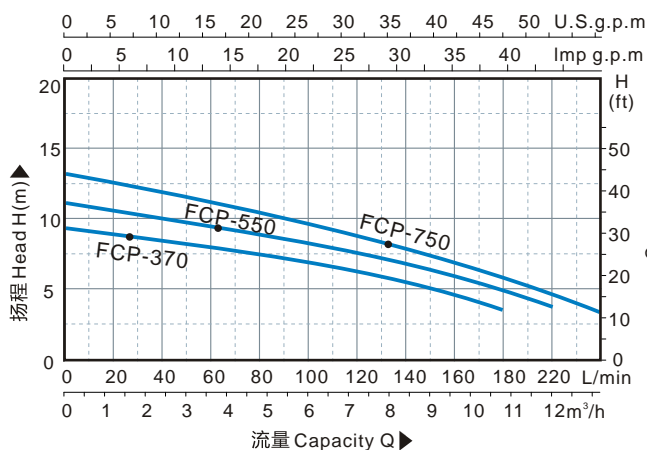

技术参数 TECHNICAL DATA

型号 TYPE	输入功率 Input Power		电流 Current (A)	最大流量 Q _{max} (l/min)	最高扬程 H _{max} (m)	最大吸程 S.Head (M)	转速 Speed (r/min)	流量 Capacity(l/min)										
	KW	HP						0	20	40	60	80	100	120	140	180	220	
FCP-370	0.37	1/2	3	180	9	8	2850	总扬程 Total head(m)	0	9	8.5	8	7.7	7.5	7	6	5.5	3
FCP-550	0.55	3/4	3.6	200	11	8			11	10.5	10	9	8.5	8	7.5	6	5	
FCP-750	0.75	1	4.4	220	13	8			13	12.5	12	11	10.5	9	8.5	7.7	6	3
									13	12.5	12	11	10.5	9	8.5	7.7	6	3

Note: 110V/60Hz, 115V/60Hz, 127V/60Hz, 110/220V/60Hz, 380V/50Hz etc. Models are available on request
 备注: 可以按要求生产110V/60Hz, 115V/60Hz, 127V/60Hz, 110/220V/60Hz等电压频率

安装尺寸 DIMENSIONS

型号 TYPE	外形尺寸 Dimensions(mm)											包装尺寸 Packing Size (mm)			毛重 G.W KG	包装数量 Packing QTY 20'柜(Cont)	
	进口 DNA		出口 DNM		a	b	c	d	e	f	g	h	L	W			H
	inch	mm	inch	mm													
FCP-370	-	50	-	50	550	330	183	260	128	190	10	295	580	225	300	10	630
FCP-550	-	50	-	50	550	330	183	260	128	190	10	295	580	225	300	10.6	630
FCP-750	-	50	-	50	550	330	183	260	128	190	10	295	580	225	300	11.2	630